


TUBEFLEX-(St)-CY roundshaped flat ribbon cable, screened, for IDC-technique, pitch 1,27mm, EMC-preferred type

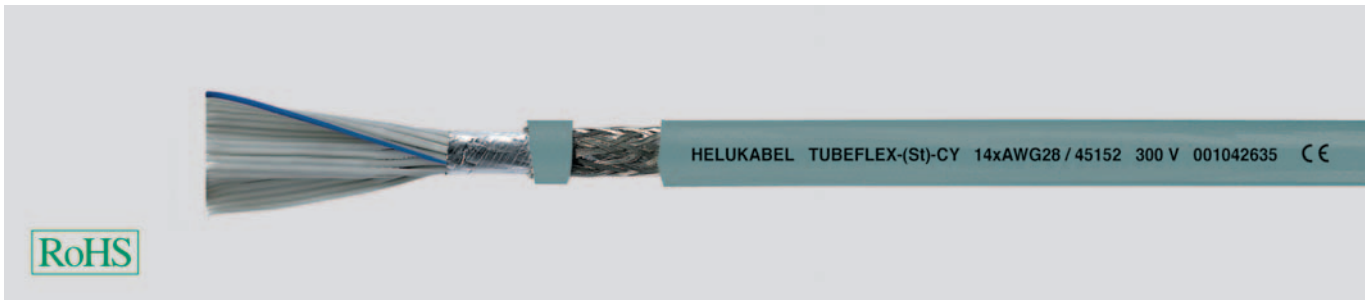

Technical data

- Roundshaped special Flat Ribbon Cable, screened
- **Conductor resistance** at 20°C
max. 230 Ohm/km
- **Temperature range**
-20°C up to +80°C
- **Voltage rating**
max. 300 V
- **Test voltage**
core/core 2000 V
core/screen 2000 V
- **Dielectric strength, Spark-test**
3000 V
- **Insulation resistance**
min. 20 MOhm x km
- **Capacitance** (side cores)
ca. 75 pF/m
- **Impedance** 115 Ohm
- **Minimum bending radius**
15x cable Ø
- **Radiation resistance**
up to 80×10^6 cJ/kg (up to 80 Mrad)

Cable structure

- Stranded tinned copper conductor, size AWG 28
 $7 \times 0,127 \text{ mm} = 0,09 \text{ mm}^2$
- Core insulation of special PVC
- Cores colour grey, edge marking on one side
- Cores laying parallel and adjacent, alternately spliced or separated and periodically slotted
- Roundshaped flat ribbon cable, folded
- Dual shielding:
(St) - plastic coated Alu-foil and
C - tinned copper wire braiding with optimal surface coverage
- Outer sheath of special PVC
- Outer sheath Colour grey

Properties

- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers
- **Very interesting for cable pre-assemblers!**
- The dual shielding with plastic coated aluminium foil (St) and the additional tinned copper wire braiding (C) protects against high frequency interference and ensures disturbance-free signal and impuls transfer.

Tests

- PVC self-extinguishing and flame retardant acc. to DIN VDE 0482-332-1-2, DIN EN 60332-1-2, IEC 60332-1 (equivalent DIN VDE 0472 part 804 test method B)

Application

TUBEFLEX-(St)-CY Flat ribbon cable, due to its roundshape offers considerable advantages compared with other flat ribbon cables during the installation and assembly. This roundshaped cable bids enormous profits by using the quick and economical possibilities under continuance with the efficient connection in IDC-technique. All conductors can be contacted at one working procedure without stripping the insulation. The accurate to size pitch-image of the ribbon cable is obtained due to an adapted backshaping before the plug installation.

EMC = Electromagnetic compatibility

To optimize the EMC features we recommend a large round contact of the copper braiding on both ends.

CE = The product is conformed with the EC Low-Voltage Directive 2006/95/EC.

Part no.	No. cores x AWG-No.	Flat ribbon dimension Width mm	Outer sheath nominal wall-thickness mm	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km
45150	9 x 28	11,43	0,8	6,3	30,9	56,0
45151	10 x 28	12,70	0,8	6,4	31,9	57,0
45152	14 x 28	17,78	0,8	7,2	35,6	70,0
45153	16 x 28	20,30	0,8	7,4	42,0	75,0
45154	20 x 28	25,40	0,8	7,8	45,8	83,0
45155	24 x 28	30,48	0,8	9,0	54,3	97,0
45156	25 x 28	31,75	0,8	9,0	55,2	100,0
45157	26 x 28	33,02	0,8	9,0	60,0	101,0
45158	30 x 28	38,10	0,8	9,2	60,4	113,0
45159	34 x 28	43,20	0,8	10,2	68,1	122,0
45160	36 x 28	45,72	0,8	10,4	70,1	126,0

Part no.	No. cores x AWG-No.	Flat ribbon dimension Width mm	Outer sheath nominal wall-thickness mm	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km
45161	37 x 28	47,00	1,0	10,5	71,1	128,0
45162	40 x 28	50,80	1,0	11,3	74,1	135,0
45163	50 x 28	63,50	1,0	11,6	88,3	160,0
45164	60 x 28	76,20	1,0	12,9	98,7	172,0
45165	64 x 28	81,30	1,0	13,3	107,2	192,0

Dimensions and specifications may be changed without prior notice. (RJ01)



Suitable accessories can be found in Chapter X.

- Cable Gland - STK-F
- Cable Gland - STS-F