
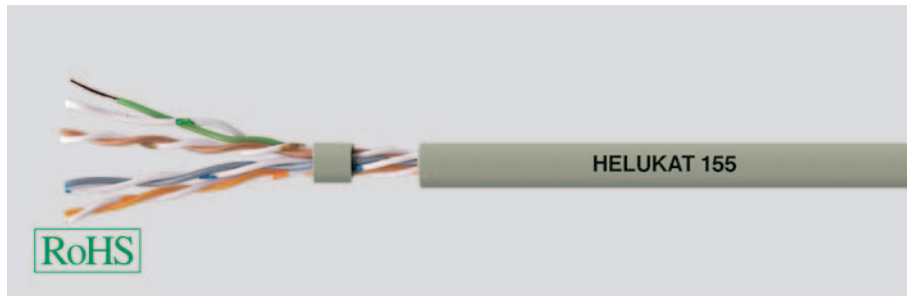


LAN Cable

Category 5e

HELUKAT® 155
U/UTP



Cable structure

Inner conductor Ø:	0,51 mm
Conductor material:	Copper, bare
Core insulation:	PE
Core colours:	whbu/bu, whog/og, whgn/gn, whbn/bn
Shielding 1:	-
Screen over stranding element:	-
Screen 1 over stranding:	-
Screen 2 over stranding:	-
Outer sheath material:	PVC
Outer diameter:	app. 4,9 mm
Outer sheath colour:	Grey

U/UTP 4x2xAWG 24/ 1 PVC

Electrical data

Characteristic impedance:	100 Ohm ± 15 ohm at 1 to 100 MHz 100 Ohm ± 20 ohm at 101 to 155 MHz
Loop resistance:	190 Ohm/km max.
Mutual capacitance:	50 nF/km nom.
Rel. propagation velocity:	66 %

Typical values

Frequency (MHz)	10	16	62,5	100	155
Attenuation (dB/100m)	6,3	8,0	16,5	21,3	26,8
Next (db)	50,3	47,3	38,4	35,3	33,0
ACR (db)	44,0	39,3	21,9	14,0	6,2

Technical data

Weight:	app. 26 kg/km
bending radius, repeated:	40 mm
Operating temperature range min.:	-20°C
Operating temperature range max.:	+60°C
Caloric load, approx. value:	0,40 MJ/m
Copper weight:	17,00 kg/km

Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 5e

Application

HELUKAT®155 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s, or ISDN absolutely trouble-free. Likewise, the mechanical characteristics are perfectly suited for the application in tight cable channels and platforms due to their optimized construction.

Part no.

80053, U/UTP 4x2xAWG24/1 PVC (UTP)

Dimensions and specifications may be changed without prior notice.

