


LAN Cable

Category 7e

HELUKAT® 600
S/FTP



Cable structure


Inner conductor Ø: 0,57 mm
 Conductor material: Copper, bare
 Core insulation: Foam-skin-PE
 Core colours: wh/bu, wh/og, wh/gn, wh/bn
 Shielding 1: -
 Screen over stranding element: Polyester foil, aluminium-lined
 Screen 1 over stranding: Cu braid
 Screen 2 over stranding: -
 Outer sheath material: FRNC
 Outer diameter: app. 7,5 mm
 Outer sheath colour: Blue Lilac similar to RAL 4005

S/FTP 4x2xAWG 23/1 FRNC

0,57 mm
 Copper, bare
 Foam-skin-PE
 wh/bu, wh/og, wh/gn, wh/bn
 -
 Polyester foil, aluminium-lined
 Cu braid
 -
 FRNC
 app. 7,5 mm
 Blue Lilac similar to RAL 4005

Electrical data

Characteristic impedance: 100 Ohm ± 15 ohm at 1 to 100 MHz
 100 Ohm ± 20 ohm at 101 to 1000 MHz
 Loop resistance: 169 Ohm/km max.
 Mutual capacitance: 43 nF/km nom.
 Rel. propagation velocity: 79 %

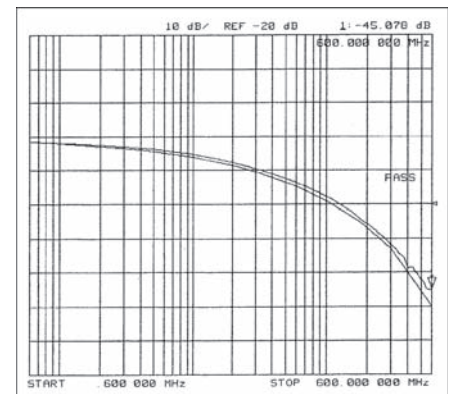

Typical values


| Frequency (MHz) | 10 | 16 | 62,5 | 100 | 200 | 300 | 600 | 900 | 1000 |
|-----------------------|-------|-------|------|------|------|------|------|------|------|
| Attenuation (dB/100m) | 5,6 | 7,1 | 13,9 | 17,5 | 25,2 | 32,1 | 44,9 | 55,0 | 58,0 |
| Next (db) | 100,0 | 100,0 | 96,0 | 94,0 | 88,0 | 84,0 | 73,0 | 71,0 | 69,0 |
| ACR (db) | 94,4 | 92,9 | 82,1 | 76,5 | 62,8 | 51,9 | 28,1 | 16,0 | 9,0 |

Technical data

Weight: app. 60 kg/km
 bending radius, repeated: 60 mm
 Operating temperature range min.: -20°C
 Operating temperature range max.: +60°C
 Caloric load, approx. value: 0,60 MJ/m
 Copper weight: 28,00 kg/km

Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 7e, Flame-retardant acc. to IEC 60332-3, Smoke density acc. to IEC 61034, Halogen-free acc. to 60754-2, Corrosiveness acc. to EN50267-2-3

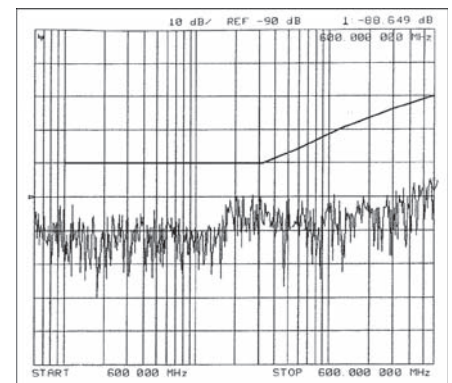

Application

HELUKAT®600 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Gigabit Ethernet, Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s or ISDN absolutely trouble-free. Likewise, the mechanical characteristics are perfectly suited for the application in tight cable channels and platforms due to their optimized construction.

Part no.

80810, S/FTP 4x2xAWG 23/1 FRNC (S-STP)

Dimensions and specifications may be changed without prior notice.