

STR cable gland to DIN

round



STR

The round brass gland to DIN 46320.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Material

Brass, nickel plated
Moulded seal: NR

Note


Protection classification IP 65 with additional O-ring mounted at the thread.

Technical data

Protection class: IP 54

Temperature range: -30°C up to +80°C

Test standard: EN50262

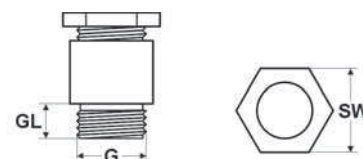

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
98088	M12 x 1,5	4,0 - 6,0	5,0	13	100	o. r.	o. r.	o. r.
98089	M16 x 1,5	8,0 - 10,0	5,0	15	100	o. r.	o. r.	o. r.
98090	M20 x 1,5	8,0 - 10,0	6,0	18	50	o. r.	o. r.	o. r.
98091	M20 x 1,5	10,0 - 12,0	6,0	20	50	o. r.	o. r.	o. r.
98092	M20 x 1,5	12,0 - 14,0	6,0	22	50	o. r.	o. r.	o. r.
98093	M25 x 1,5	17,0 - 19,0	6,0	28	50	o. r.	o. r.	o. r.
98094	M32 x 1,5	26,0 - 27,0	6,0	37	25	o. r.	o. r.	o. r.
98095	M40 x 1,5	33,0 - 35,0	7,0	47	10	o. r.	o. r.	o. r.
98096	M50 x 1,5	39,0 - 41,0	8,0	54	5	o. r.	o. r.	o. r.
98097	M63 x 1,5	43,0 - 45,0	9,0	60	5	o. r.	o. r.	o. r.

PG thread

Part no.	Size PG	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
90530	7	4,0 - 6,0	5,0	13	50	o. r.	o. r.	o. r.
90531	9	8,0 - 10,0	6,0	15	50	o. r.	o. r.	o. r.
90532	11	8,0 - 10,0	6,0	18	50	o. r.	o. r.	o. r.
90533	13,5	10,0 - 12,0	6,5	20	50	o. r.	o. r.	o. r.
90534	16	12,0 - 14,0	6,5	22	50	o. r.	o. r.	o. r.
90535	21	17,0 - 19,0	7,0	28	25	o. r.	o. r.	o. r.
90536	29	26,0 - 28,0	8,0	37	25	o. r.	o. r.	o. r.
90537	36	33,0 - 35,0	9,0	47	10	o. r.	o. r.	o. r.
90538	42	39,0 - 41,0	10,0	54	5	o. r.	o. r.	o. r.
90539	48	45,0 - 47,0	10,0	60	5	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request