

STK-F flat cable gland



STK-F

The plastic flat cable gland.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Material

Polyamide
Seal: SBR
Thrust washers: Galvanised steel

- halogen-free
- phosphor-free
- silicone-free
- cadmium-free


Note

Protection classification IP 65 with an additional O-ring on the external thread.

Technical data

Protection class: IP 54

Temperature range: -30°C up to +80°C

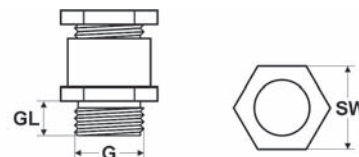

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no. light grey RAL 7035	Size Metr.	Cable thickness from / to mm	Cable width from / to mm	Thread length mm	Spanner size mm	Unit
904996	M25 x 1,5	3,0 - 8,0	9,0 - 21,0	11,0	32	50
904997	M32 x 1,5	4,0 - 11,5	14,0 - 30,0	11,0	42	50
905067	M40 x 1,5	4,0 - 11,5	14,0 - 30,0	11,0	42	20
904998	M50 x 1,5	4,0 - 11,5	24,0 - 40,0	11,0	60	20
905068	M63 x 1,5	5,0 - 12,0	34,0 - 50,0	11,0	65	5

Dimensions and specifications may be changed without prior notice.