


Type S spiral spring by steel with outer sheath by PVC

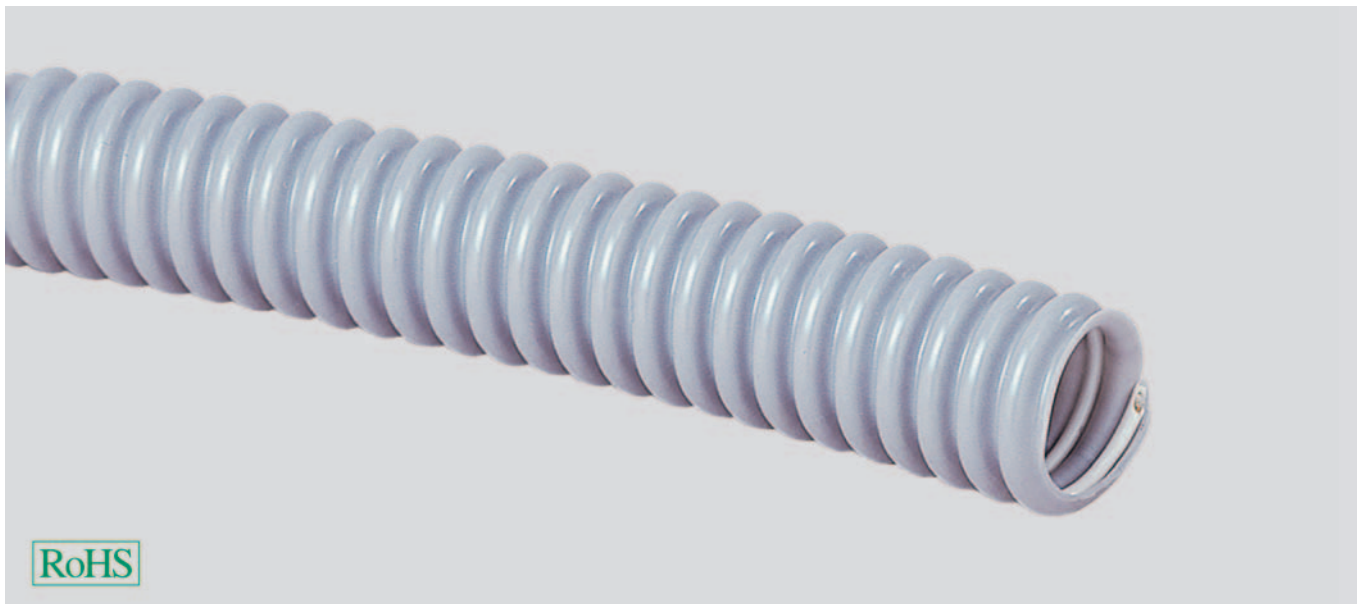

Type S

Cable protection tube type S with integrated spring steel wire, extremely flexible, expandable and compressible.

Application

- Plant and machine construction
- Automation technology
- Installation technology
- Control cabinet construction

Material

PVC

- silicone-free
- cadmium-free

Note

Suitable connection glands:
USK, LK-I, US and LI

Technical data

Temperature range: -25°C up to +80°C
Temperature range temporary up to +100°C

Part no. grey	Inner Ø mm	Outer Ø mm	Per metres	
91219	7,0	10,0	50	-
91220	10,0	14,0	50	-
91221	13,0	17,0	50	-
91222	15,0	19,0	50	-
91223	16,0	21,0	50	-
91224	22,0	27,0	50	-
91225	29,0	36,0	25	-
91226	38,0	45,0	25	-
91228	48,0	56,0	25	-

small package

Part no. grey	Inner Ø mm	Outer Ø mm	Per metres	
91270	7,0	10,0	10	-
91271	10,0	14,0	10	-
91272	13,0	17,0	10	-
91273	15,0	19,0	10	-
91274	16,0	21,0	10	-
91275	22,0	27,0	10	-
91276	29,0	36,0	10	-
91277	38,0	45,0	10	-
91279	48,0	56,0	10	-

Dimensions and specifications may be changed without prior notice.