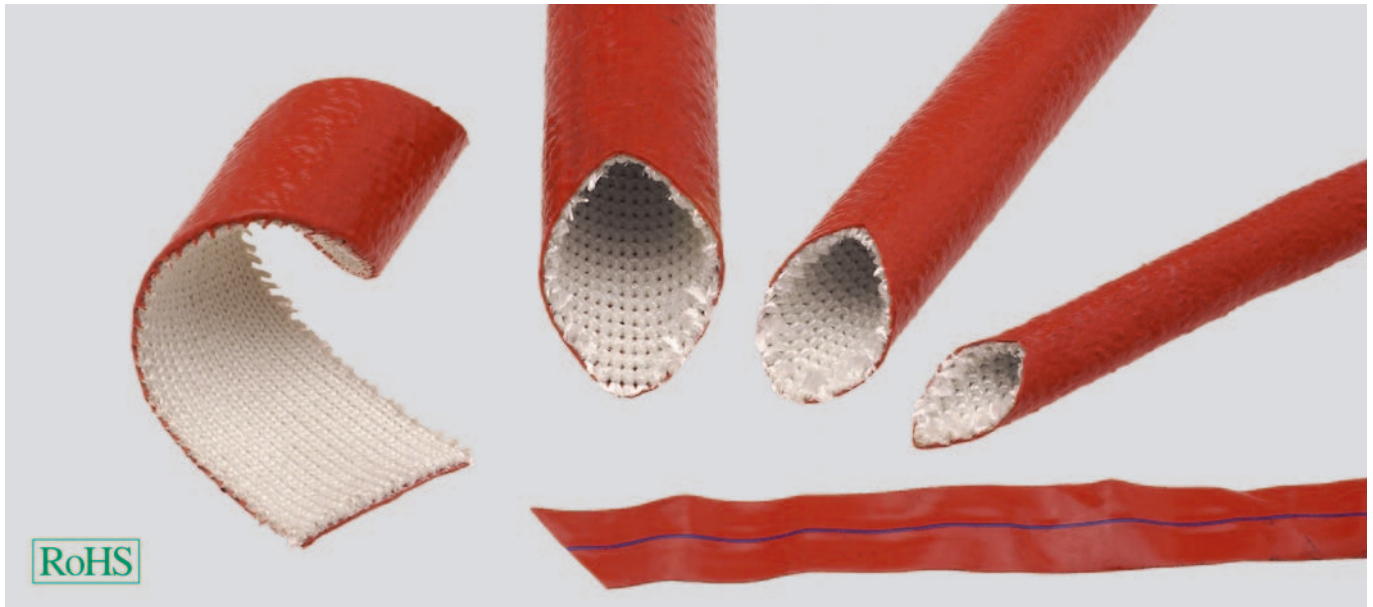


**HTP** protection tube

high temperature protection

**HTP**

This product is extremely heat resistant. HTP has a high insulation factor and, due to the iron oxide containing silicone sheath, is resistant to small quantities of liquid steel. HTP also protects against burn injuries from steam tubes, hot air or hot water lines.

**Material**

Interior sheath of knitted glass-fibre braid  
Silicone sheath (contains iron oxide)  
Colour: orange

**Technical data**

Permanent load: +260°C  
Short-time load: +1090°C  
(up to approx. 20 minutes)  
Loading moment: +1640°C  
(approx. 15-30 seconds)

**protection tube**

Part no.	Inner Ø mm	Width mm	Per metres
93630	6,0	-	15,0
93632	10,0	-	15,0
904924	13,0	-	15,0
93634	19,0	-	15,0
93635	22,0	-	15,0
93636	25,0	-	15,0
93637	32,0	-	15,0
93638	38,0	-	15,0
93639	44,0	-	15,0
93640	57,0	-	15,0
93641	64,0	-	15,0
93642	76,0	-	15,0
93643	89,0	-	15,0
93644	102,0	-	15,0

Dimensions and specifications may be changed without prior notice.