


JZ-500 orange flexible, orange cores, control cable for interlocking purposes, meter marking



A

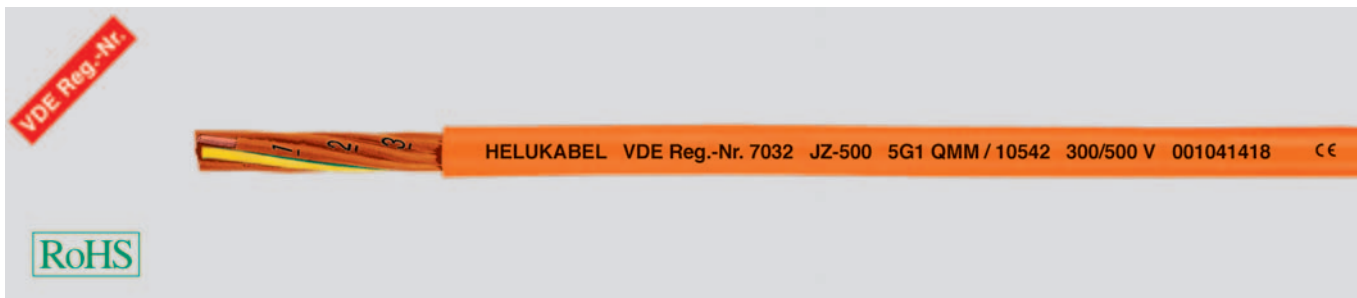

Technical data

- Special-PVC control cable for interlocking purposes adapted to DIN VDE 0285-525-2-51 / DIN EN 50525-2-51
- **Temperature range**
flexing -15°C to +80°C
fixed installation -40°C to +80°C
- **Nominal voltage** U₀/U 300/500 V
- **Test voltage** 4000 V
- **Breakdown voltage** min. 8000 V
- **Insulation resistance**
min. 20 MOhm x km
- **Minimum bending radius**
flexing 7,5x cable Ø
fixed installation 4x cable Ø
- **Radiation resistance**
up to 80x10⁶ cJ/kg (up to 80 Mrad)

Cable structure

- Bare copper-conductor, to DIN VDE 0295 cl.5, fine-wire, BS 6360 cl.5, IEC 60228 cl.5
- Core insulation of special PVC compound type Z 7225
- Core identification to DIN VDE 0293 orange cores with continuous black numbering
- JZ-version with GN-YE conductor 3 cores and above
- OZ-version without GN-YE conductor
- Cores stranded in layers with optimal lay-length
- Outer sheath of special PVC compound type TM2 to DIN VDE 0207-363-4-1 / DIN EN 50363-4-1
- Sheath colour orange (RAL 2003)
- with meter marking

Properties

- Extensively oil resistant, oil-/chemical resistance see table Technical Informations
- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers

Tests

- PVC self-extinguishing and flame retardant acc. to DIN VDE 0482-332-1-2, DIN EN 60332-1-2, IEC 60332-1 (equivalent DIN VDE 0472 part 804 test method B)

Note

- G = with green-yellow conductor
- x = without green-yellow conductor (OZ)
- AWG sizes are approximate equivalent values. The actual cross-section is in mm².

Application

These cables are used for flexible use for medium mechanical stresses with free movement without tensile stress or forced movements in dry, moist and wet rooms but not suitable for open air, as control cable acc. to EN 60204 part 1 and VDE 0113 part 1. As per recommendation of the specified standards the insulated conductors of control current circuits should be coloured orange, when they are used for interlocking purposes. These control circuits are supplied with an external power and remain active under current when the main switch is disconnected or switched off.

CE= The product is conformed with the EC Low-Voltage Directive 2006/95/EC.

Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
10537	2 x 1	5,6	19,2	60,0	18
10538	3 G 1	5,9	29,0	72,0	18
10539	3 x 1	5,9	29,0	72,0	18
10541	4 x 1	6,6	38,4	86,0	18
10540	4 G 1	6,6	38,4	86,0	18
10542	5 G 1	7,3	48,0	104,0	18
10544	2 x 1,5	6,4	29,0	70,0	16
10545	3 G 1,5	6,8	43,0	90,0	16

Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
10546	4 G 1,5	7,4	58,0	109,0	16
10547	5 G 1,5	8,3	72,0	131,0	16
10747	3 G 2,5	8,3	72,0	148,0	14
10748	4 G 2,5	9,2	96,0	178,0	14
10749	5 G 2,5	10,1	120,0	221,0	14

Dimensions and specifications may be changed without prior notice. (RA01)



Suitable accessories can be found in Chapter X.

- Cable Gland - HELUTOP® HT-PA
- Cable Gland - HELUTOP® HT-MS