

# HSK-B cable gland

anti-kink



## HSK-B

With anti-bend spirals

- Easy to assemble
- Completely water-tight
- Optimum strain relief
- Large clamping areas

## Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

## Material

Polyamide  
Moulded seal: NBR


- halogen-free
- phosphor-free
- silicone-free
- cadmium-free

## Technical data

Protection class: IP 68 - 10 bar / IP 69K (within the specific clamping range with additional o-ring)

Temperature range: -40°C up to +100°C

Test standard: EN50262

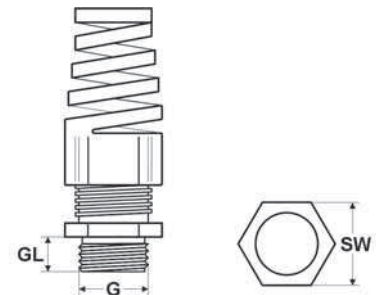

## Dimensions

G Thread size  
GL Thread length  
SW Spanner size

### metric thread

Part no. light grey RAL 7035	Part no. black RAL 9005	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
							up to 100	101 - 500	501 - 1000
98005	98011	M12 x 1,5	3,0 - 6,5	8,0	15	50	o. r.	o. r.	o. r.
98006	98012	M16 x 1,5	4,0 - 8,0	8,0	19	50	o. r.	o. r.	o. r.
98008	98014	M20 x 1,5	6,0 - 12,0	9,0	24	50	o. r.	o. r.	o. r.
98009	98015	M20 x 1,5	10,0 - 14,0	9,0	27	25	o. r.	o. r.	o. r.
98010	98016	M25 x 1,5	13,0 - 18,0	11,0	33	20	o. r.	o. r.	o. r.

### PG thread

Part no. light grey RAL 7035	Part no. black RAL 9005	Size PG	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
							up to 100	101 - 500	501 - 1000
90320	90326	7	3,0 - 6,5	8,0	15	50	o. r.	o. r.	o. r.
90321	90327	9	4,0 - 8,0	8,0	19	50	o. r.	o. r.	o. r.
90322	90328	11	5,0 - 10,0	8,0	22	50	o. r.	o. r.	o. r.
90323	90329	13,5	6,0 - 12,0	9,0	24	50	o. r.	o. r.	o. r.
90324	90330	16	10,0 - 14,0	10,0	27	25	o. r.	o. r.	o. r.
90325	90331	21	13,0 - 18,0	11,0	33	20	o. r.	o. r.	o. r.

### NPT thread

Part no. light grey RAL 7035	Part no. black RAL 9005	Size NPT	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
							up to 100	101 - 500	501 - 1000
92300	92305	3/8"	4,0 - 8,0	15,0	22 / 19	50	o. r.	o. r.	o. r.
92301	92306	1/2"	6,0 - 12,0	13,0	24	50	o. r.	o. r.	o. r.
92302	92307	1/2"	10,0 - 14,0	13,0	27	25	o. r.	o. r.	o. r.
92303	92308	3/4"	13,0 - 18,0	14,0	33	20	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request