



BUS Cables

Profibus L2

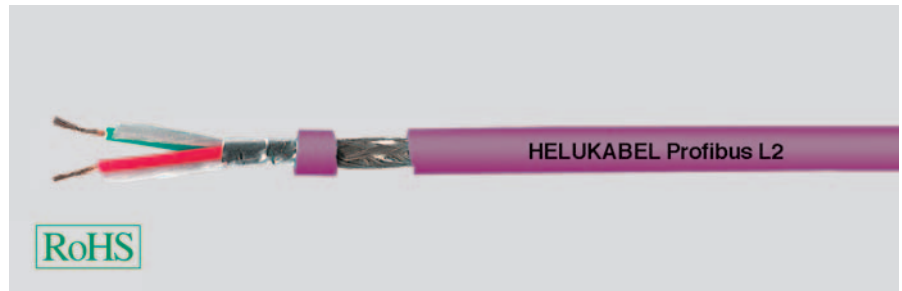

Drag Chain



Type Cable structure

Inner conductor diameter:
Core insulation:
Core colours:
Stranding element:
Shielding 1:
Shielding 2:
Total shielding:
Outer sheath material:
Cable external diameter:
Outer sheath colour:

Drag chain applications 1x2x0.64 mm (stranded)

Copper, bare (AWG 24/19)
Foam-skin-PE
rd, gn
2 cores + 2 fillers stranded together
Polyester foil over stranded bundle
Polyester foil, aluminium-lined
Cu braid, tinned
PUR
app. 8,0 mm ± 0,4 mm
Violet similar to RAL 4001

Drag chain applications 1x2x0.64 mm (stranded)

Copper, bare (AWG 24/19)
Foam-skin-PE
rd, gn
2 cores + 2 fillers stranded together
Polyester foil over stranded bundle
Polyester foil, aluminium-lined
Cu braid, tinned
PUR
app. 8,0 mm ± 0,4 mm
Petrol similar to RAL 5018

Electrical data

Characteristic impedance:
Conductor resistance, max.:
Insulation resistance, min.:
Loop resistance:
Mutual capacitance:
Test voltage:
Attenuation:

150 Ohm ± 10 %
80 Ohm/km
1 GOhm x km
160 Ohm/km max.
30 nF/km nom.
1,5 kV
9,6 kHz < 3,0 dB/km
38,4 kHz < 5,0 dB/km
4 MHz < 25,0 dB/km
16 MHz < 52,0 dB/km

150 Ohm ± 10 %
80 Ohm/km
1 GOhm x km
160 Ohm/km max.
30 nF/km nom.
1,5 kV
9,6 kHz < 3,0 dB/km
38,4 kHz < 5,0 dB/km
4 MHz < 25,0 dB/km
16 MHz < 52,0 dB/km

Technical data

Weight:
bending radius, repeated:
Operating temperature range min.:
Operating temperature range max.:
Caloric load, approx. value:
Copper weight:

app. 65 kg/km
63 mm
-30°C
+70°C
1,52 MJ/m
25,00 kg/km

app. 65 kg/km
63 mm
-30°C
+70°C
1,52 MJ/m
25,00 kg/km

Norms

Applicable standards:

Profibus acc. to DIN 19245 T3 and EN50170
Halogen-free acc. to 60754-2
Flame-retardant acc. to IEC 60332-1

Profibus acc. to DIN 19245 T3 and EN50170
Halogen-free acc. to 60754-2
Flame-retardant acc. to IEC 60332-1

Application

This system cable is used to interconnect L2-BUS components. This cable is an economical solution for the cell and field area. For the information exchange between different automation systems as well as for communication with the connected decentralized field units, serial field bus systems are used. The above mentioned types are suitable for drag chains (stranded).

Part no.

80267, Profibus L2

81003, Profibus L2

Dimensions and specifications may be changed without prior notice.

R