
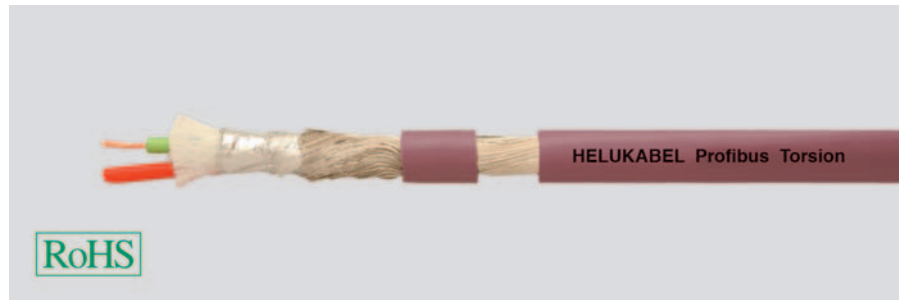


BUS Cables

Profibus L2



Type

Cable structure

Inner conductor diameter:
Core insulation:
Core colours:
Stranding element:
Shielding 1:
Shielding 2:
Total shielding:
Outer sheath material:
Cable external diameter:
Outer sheath colour:

Torsional applications

1x2x0.80 mm (stranded)

Copper, bare (AWG 22/19)
Foam-skin-PE
rd, gn
2 cores + filler
Polyester foil over stranded bundle
Polyester foil, aluminium-lined
Cu braid, tinned
PUR
app. 8,0 mm ± 0,4 mm
Violet similar to RAL 4001

Mobile use

1x2x0.65 mm (stranded)

Copper, bare (AWG 24/19)
Cell PE
rd, gn
2 cores + 2 fillers stranded together
Polyester foil over stranded bundle
Polyester foil, aluminium-lined
Cu braid, tinned
PVC
app. 8,0 mm ± 0,3 mm
Petrol similar to RAL 5018

Electrical data

Characteristic impedance:
Conductor resistance, max.:
Insulation resistance, min.:
Loop resistance:
Mutual capacitance:
Test voltage:
Relative propagation velocity:
Attenuation:

150 Ohm ± 10 %
49 Ohm/km
1 GOhm x km
98 Ohm/km max.
29 nF/km nom.
3,6 kV
-
9,6 kHz < 3,0 dB/km
38,4 kHz < 5,0 dB/km
4 MHz < 25,0 dB/km
16 MHz < 51,0 dB/km

150 Ohm ± 10 %
66,5 Ohm/km
1,6 GOhm x km
133 Ohm/km max.
28 nF/km nom.
2 kV
81 %
9,6 kHz ≤ 3,0 dB/km
38,4 kHz ≤ 4,0 dB/km
4 MHz ≤ 25,0 dB/km
16 MHz ≤ 49,0 dB/km

Technical data

Weight:
bending radius, repeated:
Operating temperature range min.:
Operating temperature range max.:
Caloric load, approx. value:
Copper weight:

app. 66 kg/km
100 mm
-25°C
+75°C
0,89 MJ/m
32,00 kg/km

app. 64 kg/km
70 mm
-40°C
+60°C
1,09 MJ/m
23,00 kg/km

Norms

Applicable standards:

Profibus acc. to DIN 19245 T3 and EN50170
Halogen-free acc. to 60754-2
Flame-retardant acc. to IEC 60332-1
CMX 75°C (shielded)
-

Profibus acc. to DIN 19245 T3 and EN50170
Flame-retardant acc. to EN 50265-2-1

UL Style:
CSA standard:

CMG 75°C or CL2 or AWM 20201 600V
CSA FT 4

Application

HELUKABEL® Profibus Torsion is used in mobile applications in robots. The special torsion construction allows this cable to be twisted (torsioned) and is halogen-free thanks to use PU sheath. The Festoon version is used for hanging/moving loads in garland applications.

Part no.

800109, Profibus L2

800649, Profibus L2

Dimensions and specifications may be changed without prior notice.

R